


# Eaton 5L UPS

600/800/1000VA



## Ideal for protecting:

- PC and workstations
- Network-attached storage
- Internet access point
- Point of sales equipment
- Business telephony

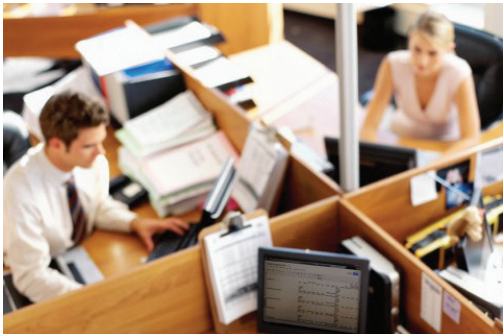

## Line interactive UPS

### Line interactive technology at an affordable price

- Secure your data and equipment by protecting you against power outages and bad power quality
- With Automatic Voltage Regulation (AVR), Eaton 5L UPS can ride through under & over voltage without utilizing battery
- Unmatched price/performance ratio

### Eaton reliability

- Rely on batteries anytime : Eaton 5L UPS can start up on batteries without mains (Cold Start)
- Eaton 5L UPS is equipped with data line surge protection (internet/fax) to avoid back door damages coming through phone lines
- Ensure piece of mind with 2 years warranty

### Easy integration


- Ease of connection to any equipment (PC, HD TV, internet gateway) with universal outlets that support NEMA 5-15P and Schuko
- Install Eaton 5L UPS anywhere thanks to its small size
- Manage your UPS from your PC:
  - Shutdown software compatible with most OS for safe system shutdown and easy monitoring of UPS condition
  - UPS comes equipped with USB port and USB communication cable

# EATON


Powering Business Worldwide

# Eaton 5L UPS

- 1 LED
- 2 On / Off button
- 3 USB port
- 4 Fixed input cord 5-15P
- 5 Data line protection
- 6 4 outlets  
Supports NEMA 5-15P and Schuko

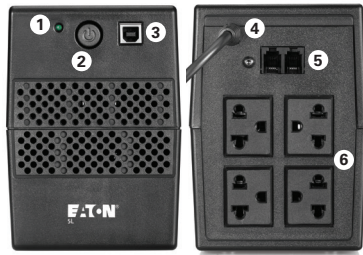

600VA / 800VA

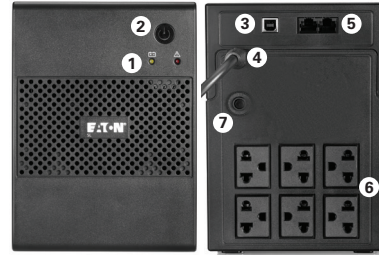

1000VA

- 1 LED
- 2 On / Off button
- 3 USB port
- 4 Fixed input cord 5-15P
- 5 Data line protection
- 6 6 outlets  
Supports NEMA 5-15P and Schuko
- 7 Circuit breaker

Technical specifications	600 USB	800 USB	1000 USB
Rating (VA/W)	600VA/360W	800VA/480W	1000VA/600W
Format	Tower		
<b>Electrical characteristics</b>			
Technology	Line interactive		
Input voltage ranges without using batteries	160V - 290V		
Output voltage	230V		
Output frequency	Auto sensing, 50Hz default		
Data line surge protection (internet/tel/fax)	Yes		
<b>Connections</b>			
Input	5-15P fixed cord		
Outputs	4 outlets Support NEMA 5-15P and Schuko	6 outlets Support NEMA 5-15P and Schuko	
<b>Batteries</b>			
Typical backup times for 1 PC*	16 min	20 min	30 min
Typical backup times for 2 PC*	5 min	6 min	11 min
Typical backup times for 3 PC*	1 min	2 min	7 min
Battery management	Permanent battery recharge, cold start		
<b>Power management</b>			
Communication ports	USB port		
Software	Winpower		
<b>Operating conditions, standards and approvals</b>			
Operating temperature	0-40°C		
Noise level	<40db		
Regulations	EN62040-2, EN61000-4		
<b>Dimensions D x H x W / Weight</b>			
Dimensions (mm)	278 x 100 x 140		359 x 139 x 191
Weight (kg)	4.3	5.1	8.9
<b>Customer service &amp; support</b>			
Warranty	2 years		

\* Backup times are approximate and may vary with equipment, configuration, battery age, temperature, etc.

Model	600 USB	800 USB	1000 USB
Part Number	5L600TH	5L800TH	5L1000TH

## THAILAND

99/167 Moo.2 Chaengwattana Rd  
Thungsonghong, Laksi  
Bangkok 10210, Thailand  
T: + 66 (0) 2575 0530  
E: EatonSEA@eaton.com  
W: www.eaton.com/ups

Eaton is the trade name, trademark, and/or service mark of Eaton Corporation or its subsidiaries and affiliates.